



Watertight
hinged doors

Single leaf watertight door with central locking



- All doors are produced according to customer sizes
- Standard specifications:
- Sigmaweld MC weld primer
- Angle bar frame 75 x 50 x 7 mm
- HIP = Clear opening + 75mm
- Radius in superstructure 137,5
- Adjustable M-20 hinges with grease nipple
- 6 or 8 mm steel door leaf
- Stainless steel handles and Quick Pin locking
- Bureau Veritas Type Approval

Watertight steel door with central locking



- Watertight machine room door
- Insulated with Marine Fire Batts Insulation
- Standard specifications:
- Sigmaweld MC weld primer
- Angle bar frame 75 x 50 x 7 mm
- HIP = Clear opening + 75mm
- Radius in superstructure 137,5
- Adjustable M-20 hinges with grease nipple
- 6 or 8 mm steel door leaf
- Stainless steel handles and Quick Pin locking

Single leaf watertight door with DIN clips



- All doors are produced according to customer sizes
- Standard specifications:
- Sigmaweld MC weld primer
- Angle bar frame 75 x 50 x 7 mm
- HIP = Clear opening + 75mm
- Radius in superstructure 137,5
- Adjustable M-20 hinges with grease nipple
- 6 or 8 mm steel door leaf
- Stainless steel handles and DIN Toggles/Clips locking

- Bureau Veritas Type Approval


Double leaf watertight doors with central locking



- All doors are produced according to customer sizes
- Standard specifications:
- Sigmaweld MC weld primer
- Angle bar frame 75 x 50 x 7 mm
- HIP = Clear opening + 75mm
- Radius in superstructure 137,5
- Adjustable M-20 hinges with grease nipple
- 6 or 8 mm steel door leaf
- Stainless steel handles and Quick Pin locking

- Bureau Veritas Type Approval

Aluminum watertight door with central locking

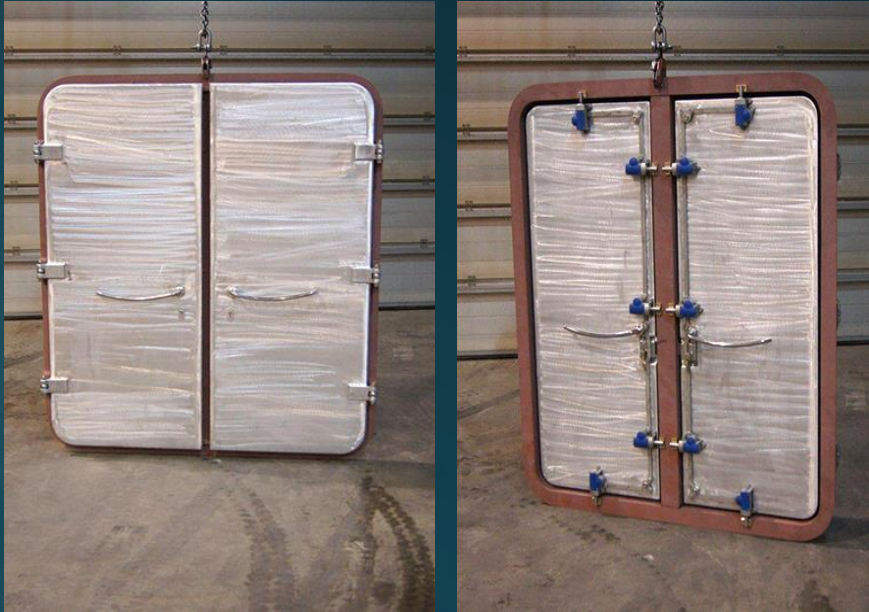

- All doors are custom build according to customer sizes
- Standard specifications:
 - 40mm insulation
 - Bolt or weld frame, R=150 or mitted corners
 - Anodized or powder coated frames and doorleaves
 - 4mm aluminium door leaf and 2mm cover
 - Dogs, hinges, handles and link bar system all stainless steel
- Bureau Veritas Type Approval

Watertight double leaf stainless steel door



- All doors are produced according to customer sizes
- Standard specifications:
- Sigmaweld MC weld primer
- Angle bar frame 75 x 50 x 7 mm
- HIP = Clear opening + 75mm
- Radius in superstructure 137,5
- Adjustable M-20 hinges with grease nipple
- 6 or 8 mm steel door leaf
- Stainless steel handles and Quick Pin locking

Aluminium watertight door with DIN clips



- DIN clip aluminum watertight doors
- Painted RAL 9010.
- Dogs are polished stainless steel.
- Standard specifications:
- 40mm insulation
- Bolt or weld frame, R=150 or mittred corners
- Anodized or powder coated frames and doorleaves
- 4mm aluminium door leaf and 2mm cover

Aluminium weathertight door with porthole



- DIN clip aluminum weathertight door with porthole
- Painted RAL 9010.
- Dogs are polished stainless steel.
- Standard specifications:
- 40mm insulation
- Bolt or weld frame, R=150 or mittred corners
- Anodized or powder coated frames and doorleaves
- 4mm aluminium door leaf and 2mm cover