



Since 1956

safety at sea level



A60 Weathertight- & Watertight Fire Doors



- /// Weathertight / Watertight
- /// A60 Certified Fire door
- /// Musketeer system, Quick Acting
- /// Adjustable Cleats and Hinges
- /// Watertight to 120 KN/m²
- /// all moving parts Stainless steel

Safety at Sea Level – The A60 Water- and Weathertight musketeer doors are designed for the most extreme conditions and are showing an excellent performance during fire testing and operational test. Winel produces Marine doors for over 30 years and holds type approvals from all major classifications.

A60 Water- and Weathertight Fire doors are fully MED Certified as fire doors according FTP-Code 2010. Winel's A60 doors are type approved by DNV-GL according to the latest rules for Classifications of ships and mobile offshore Units and comply with International Load line Convention, 1966. Individual approvals for ABS, LRS, BV are available.

Product specification



A60 WT / WET Doors

- Weathertight (WET)
- Watertight (WT)
- Single handle operated (WET)
- Hand-wheel operated (WT)

Standard type

- All moving parts stainless steel
- Greaseless bearings
- Standard angle bar frame
- Excellent performance during fire
- Low maintenance, long lifetime
- Easy adjustable closing system


Options

- Door Locks (WET)
- A60 Windows (WET)
- A60 Bulls eyes (WET)
- Offshore frame, DNV GL C301
- Coating
- Door closer / Wind hook
- Open / Close indication


During Fire test after 60 Minutes



Outside door
temp rise only 125 °C / 257 °F

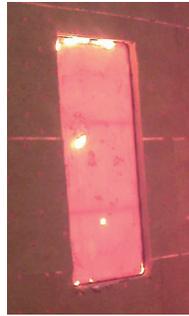


Inside door
FTP Code Temp 950 °C / 1742 °F




MED Certified

WET

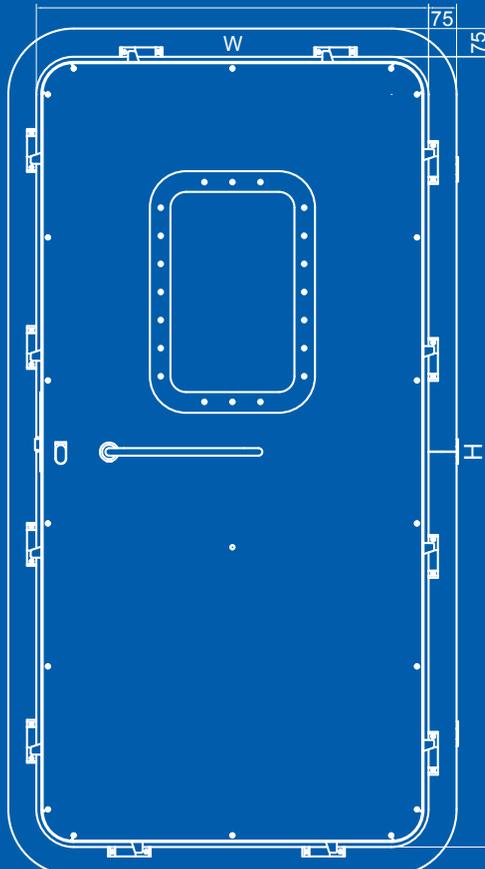

WT

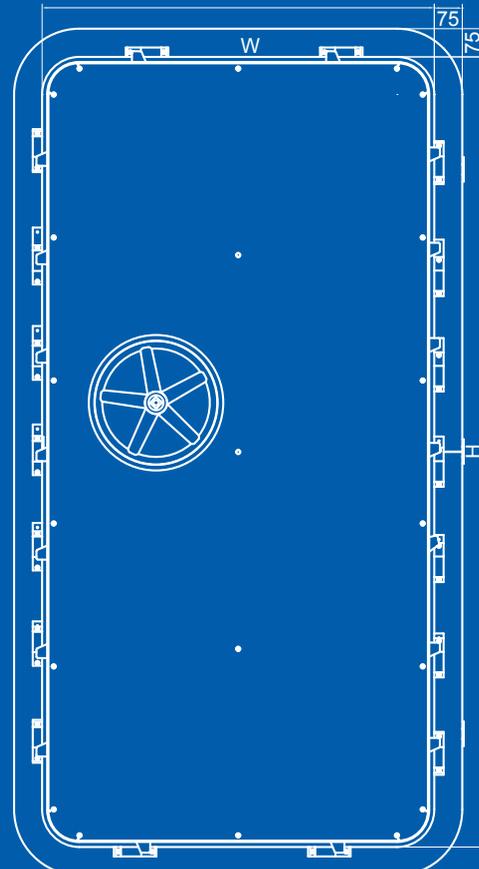

(all sizes in mm)